

FRAMES Fully assembled with footplates, floor fixings & shims				
H (mm)	D (mm)	Max Load	Code	Price £
2000	600	3600kg	ERSF26	46
2000	900	3600kg	ERSF29	53
2500	600	3600kg	ERSF256	58
2500	900	3600kg	ERSF259	63
3000	600	3600kg	ERSF36	65
3000	900	3600kg	ERSF39	70


Max load UDL calculated at a beam pitch of 500mm max

LEVELS Complete with decking & safety clips													
For more detailed dimension information, see page 206													
		Heavy Duty with 25mm Chipboard Decks				Extra Heavy Duty with 18mm Chipboard Decks & steel supports				Extra Heavy Duty with Galvanized Steel Panels			
W(mm)	D(mm)	Load Kg	UDL	Code	Price £	Load Kg	UDL	Code	Price £	Load Kg	UDL	Code	Price £
890	600	330		WS86HD	21					330		WS86HD/G	34
890	900	330		WS89HD	23					330		WS89HD/G	44
1250	600	270		WS126HD	26					270		WS126HD/G	46
1250	900	270		WS129HD	31					270		WS129HD/G	60
1785	600	700		WS176HD	44	1100		WS176SHD	54	1100		WS176HD/G	74
1785	900	315		WS179HD	48	1100		WS179SHD	66	1000		WS179HD/G	94
2140	600	825		WS216HD	59	1000		WS216SHD	72	1100		WS216HD/G	95
2140	900	380		WS219HD	66	1000		WS219SHD	83	1100		WS219HD/G	122
2315	600	900		WS236HD	65	1100		WS236SHD	79	1100		WS236HD/G	106
2315	900	400		WS239HD	73	1100		WS239SHD	94	1100		WS239HD/G	132
2675	600	950		WS266HD	74	950		WS266SHD	88	950		WS266HD/G	120
2675	900	475		WS269HD	79	950		WS269SHD	102	950		WS269HD/G	154

Extra Heavy Duty option with steel deck supports




Optional galvanized panels

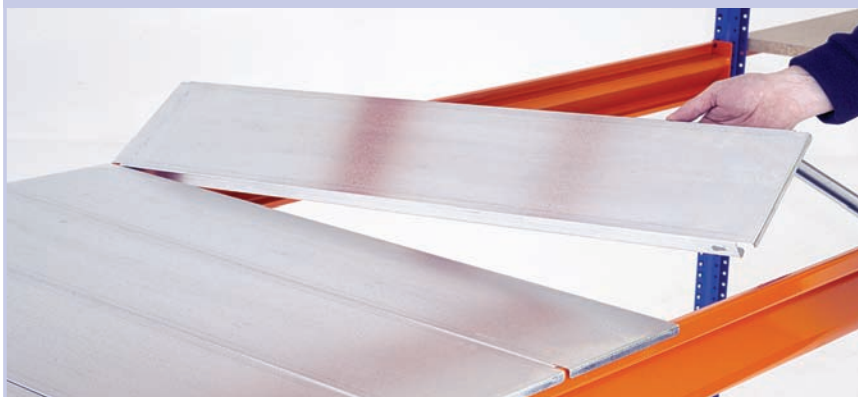

EASY ORDERING . . .

- 1 Decide which of the 3 heights of frame you need (Note, for one bay - 2 frames are needed)
- 2 Choose which of the 5 widths of levels you need

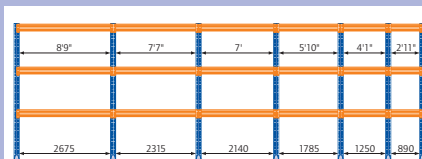

- 3 Decide how many levels you need - and call us!



RapidRacking Design

For your individual and unique storage needs

CALL • 01285 68 68 68

For help and advice on Wide Span just ask to speak to the Design Team or email Design@rapidracking.com

Wide Span

Wide Span is a highly effective warehouse shelving system with rigidly braced upright frames that do not require a bottom beam level.

It can therefore be used to span over a load that is stored on the ground, making it ideal to provide shelf levels over pallets handled by hand pallet trucks.

